

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| Material | High Conductivity Seamless Copper Tube | |
|--|--|--|
| Plating | Electro-Tin | |
| Wire Size | 450 STR/FLEX | |
| Wire Type | Stranded Copper: Class G, H, I, K, M, Locomotive | |
| Wire Strip Length | 2-3/4 in. | |
| Stud Size | 3/8 in. | |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | |
| UL Temperature Rating | 90° C | |
| C.S.A Certified Wire Connector | Yes | |
| Panduit Color Code on Barrel | BROWN | |
| Panduit Die Index No. on Barrel | P87 | |
| Alternate Industry Die Index No. () on Barrel | (20) | |





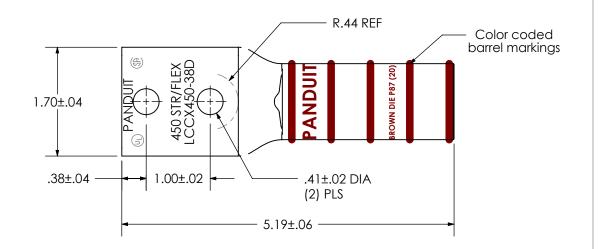

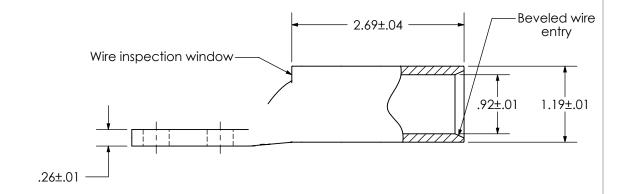

| | | | | | | CORP. TINLEY PARK, ILLINOIS |
|-----|------|-----|------|-------------|-------|---|
| | | | | | | LCCX450-38D-6 |
| 00 | 6/04 | SAC | TLCC | RELEASED | 11841 | Copper Lug - Two-Hole, Long Flex Barrel with Window |
| REV | DATE | BY | СНК | DESCRIPTION | ECN | DRAWING NO / CAD FILE LCCX450-38D-CUST |