

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
I THIS COFT IS FROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANTI-WAT DETRIWENTAL TO THE INTERESTS OF FAINDUIT CORF.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	1 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	11/16 in.		
Stud Size	1/4 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	GREEN		
Panduit Die Index No. on Barrel	P37		
Alternate Industry Die Index No. () on Barrel	(11)		





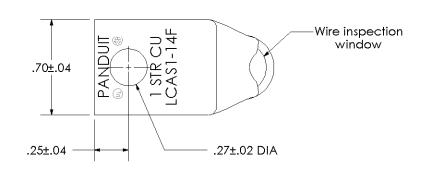

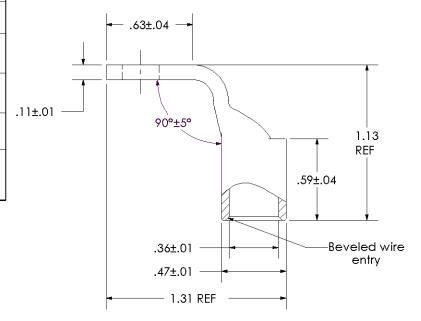



LISTED Wire Connector

						PANDUIT CORP. TINLEY PARK, ILLINOIS
						LCAS1-14F-E
01	4-03	PWS	PWS	REMOVED PANDUIT FROM BARREL MARKINGS	10790	Copper Lug - One-Hole, Short Barrel, 90° Angle Tongue
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE DRAWING NO / CAD FILE LCAS1-14F-CUST