SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP, 120/250 VAC.

AMP/40°C, 250 VAC 16

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

@ 120V 60Hz 0.04mA 0.07mA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In.

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONDS

CUSTOMER DRAWING CATALOG # 20SRBS1-W APPRVD DATE 15-000476 TAM 190CT15

TEST SPECIFICATIONS:

INDUCTANCE: N/A
CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 470pF ±20% LINE TO LINE: N/A ±20% DISCHARGE RESISTOR: WA MA

L/G AND L/L 1.R.

NO DISCHARGE RESISTOR:

6000M ∩ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

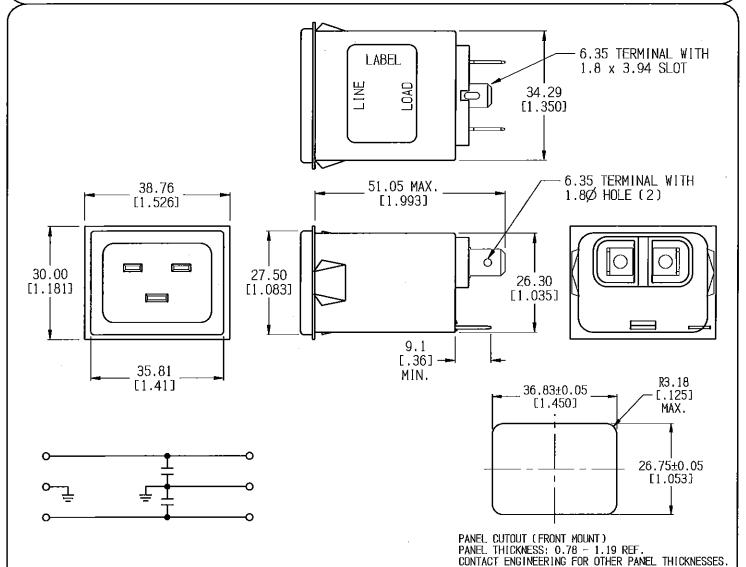

50 ഫ -50 A (MINIMUM) INSERTION LOSS FREDUENCY 5 10 50 100 300 COMMON 2 13 20 4 18 ďΒ DIFF dΒ THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCH ELECTRONICS CORPORATION AND ITS VORIDNICE SUSSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCUSSED TO AMONG CHIER THAN TYCH LEGERBOURS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCH ELECTRONICS CORPORATION. ROTRO ANGLE PROJECTIO SHET STZ (O

PARTS SHALL COMPLY WITH TYCO ELECTRONICS 138-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES UNLESS DTHERWISE SPECIFIED TOLERANCE TO BE ±0,64
MATERIAL & FINISH: AS SUPPLIED
DIMENSIONS IN MILLIMETERS

TE Connectivity

NOTES:

205R851-V 1.ckd

POWER LINE FILTER

TE PART NO.: 6-1609152-1 DATE

13AUG14 20SRBS1-W ERIG: TAM

1